



EAN: 6414150078606
static.oras.com/1010F-104



- ECO Building
- Single-lever
- Deck mounted
- Chrome
- Fixed spout
- Standard aerator
- Single operating lever/handle, Hot/Cold symbols
- Chain holder without chain
- Limitation option for maximum temperature and flow-rate
- \varnothing 40 mm ceramic cartridge for flow and temperature control
- Flexible inlet pipes
- 3S-installation system for safe and simple mounting

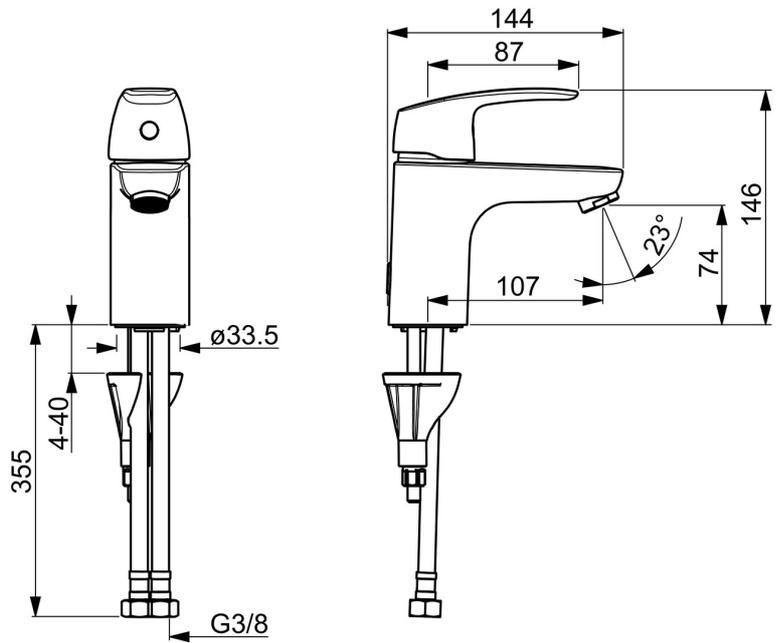

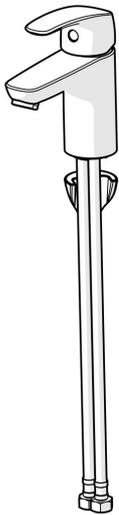

Technical data

Flow properties

Flow-rate at 300 kPa (with flow controller) **0.056 l/s**

Technical properties

Hot water supply **max. +70°C**
Working pressure **50 - 1000 kPa**
Connection size **G3/8**
Projection **107 mm**
Backflow prevention (EN1717) **AA**
Material **Brass**

Regulations


EN standard **EN 817**
Noise class **I (ISO 3822) Oras lab.**

Approvals and Declarations


STF certificate **EUFI29-22005194-TH**
Sintef **Sintef Nr. 3637**
KIWA SE **1490**
Declaration of conformity **DoC**
EPD **S-P-06391**

Sustainability

EPD module A1 (kg CO2 eq.) **5,99**
EPD module A2 (kg CO2 eq.) **0,29**
EPD module A3 (kg CO2 eq.) **0,57**
EPD module A1-A3 (kg CO2 eq.) **6,84**
EPD module A4 (kg CO2 eq.) **0,19**
EPD module B7 (kg CO2 eq.) **1038,24**
EPD module C2 (kg CO2 eq.) **0,01**
EPD module C3 (kg CO2 eq.) **0,01**
EPD module C4 (kg CO2 eq.) **0,05**
EPD module D (kg CO2 eq.) **-4,87**

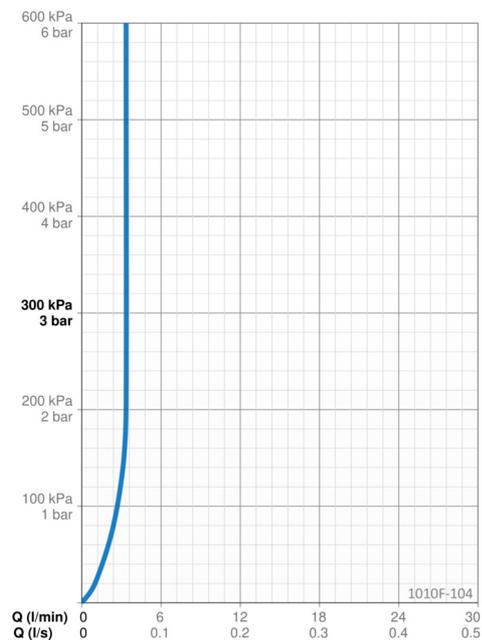

Spare parts

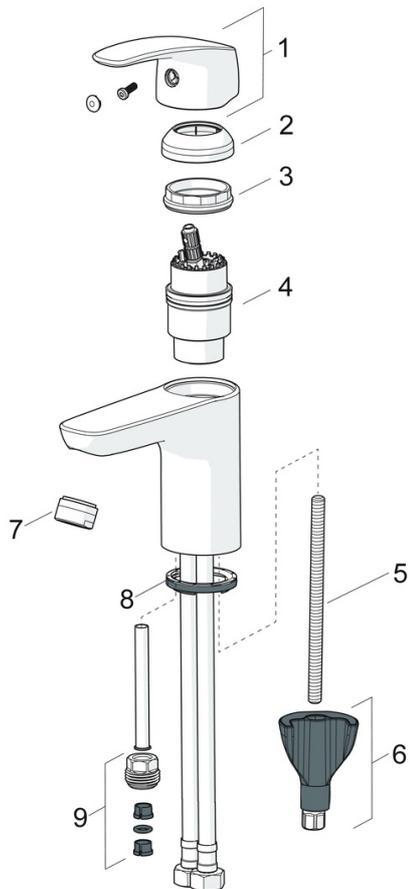

SP1012F-GB

	Name	Code
01	Lever	602502V
02	Covering cap	1000664V
03	Tightening nut, M42x1.5, SW 38	158726
04	Cartridge, Green building	600979V
05	Fixing screw, M8x1, L=130	1000780V
06	Fixing set	602610V
07	Aerator, M24x1, -105	601166V
07	Aerator, M24x1, -102	601255V
07	Aerator, M24x1, -104	601434V
08	Bottom seal	1002371V
09	Nipple	159684