



EAN: 6414150078668
static.oras.com/1012F-105



- ECO Building
- Single-lever, Bidetta
- Deck mounted
- Chrome
- Standard aerator
- Single operating lever/handle, Hot/Cold symbols
- Chain holder without chain
- Hand shower, Shower holder, Shower hose (1750 mm)
- Bidetta hand shower
- Limitation option for maximum temperature and flow-rate
- ø 40 mm ceramic cartridge for flow and temperature control
- Flexible inlet pipes
- 3S-installation system for safe and simple mounting
- 1 spray function

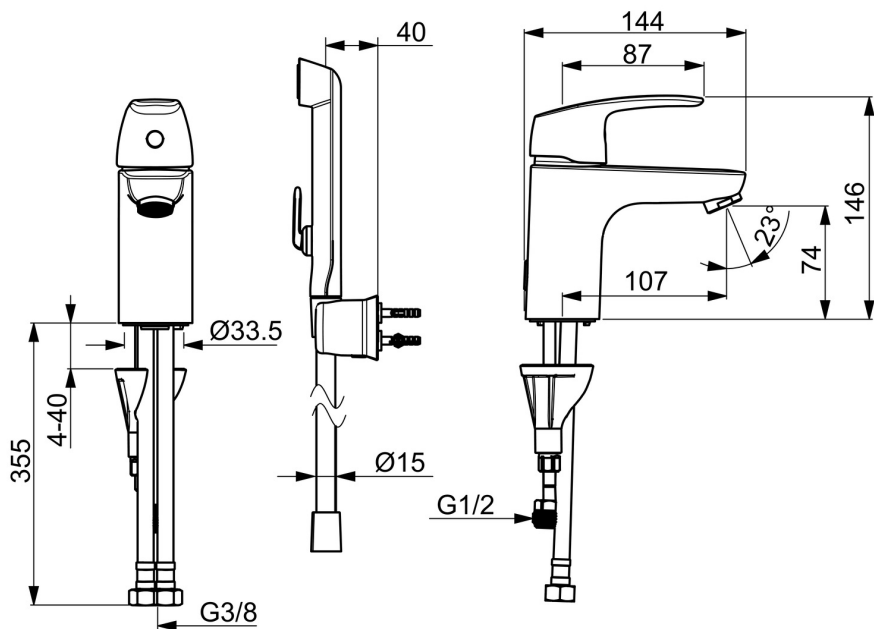

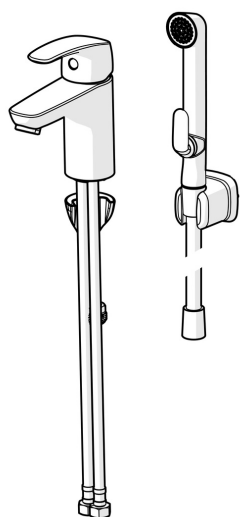

Technical data

Flow properties

Flow-rate at 300 kPa (with flow controller) 0.07 l/s

Technical properties

Hot water supply max. +70°C
Working pressure 50 - 1000 kPa
Connection size G3/8
Projection 107 mm
Material Brass

Regulations


EN standard EN 817, EN 1113
Noise class I (ISO 3822) Oras lab.

Approvals and Declarations


STF certificate EUFI29-22005194-TH
Sintef Sintef Nr. 3638
KIWA SE 1490
Declaration of conformity DoC
EPD S-P-06391

Sustainability

EPD module A1 (kg CO2 eq.) 7,75
EPD module A2 (kg CO2 eq.) 0,37
EPD module A3 (kg CO2 eq.) 0,73
EPD module A1-A3 (kg CO2 eq.) 8,86
EPD module A4 (kg CO2 eq.) 0,25
EPD module B7 (kg CO2 eq.) 1297,80
EPD module C2 (kg CO2 eq.) 0,02
EPD module C3 (kg CO2 eq.) 0,02
EPD module C4 (kg CO2 eq.) 0,07
EPD module D (kg CO2 eq.) -6,30

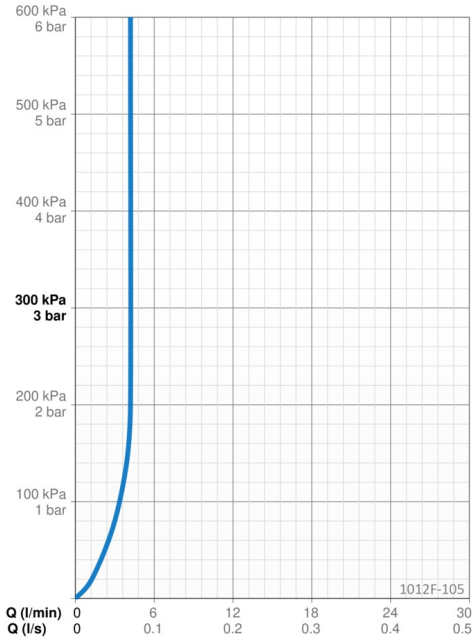

Spare parts

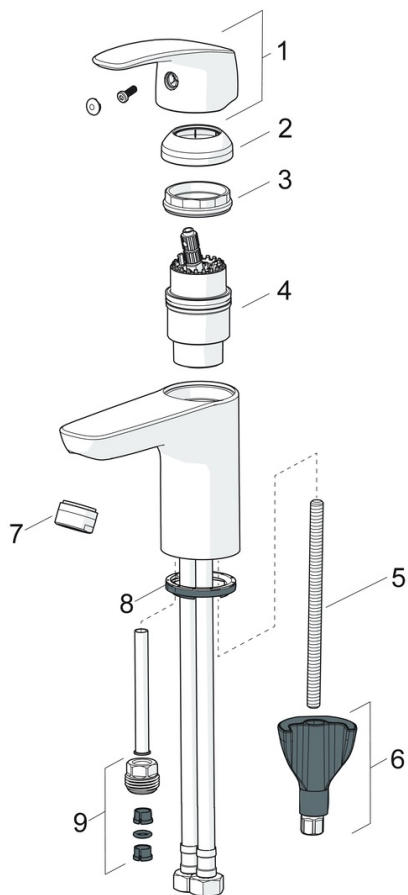

SP1012F-GB

	Name	Code
01	Lever	602502V
02	Covering cap	1000664V
03	Tightening nut, M42x1.5, SW 38	158726
04	Cartridge, Green building	600979V
05	Fixing screw, M8x1, L=130	1000780V
06	Fixing set	602610V
07	Aerator, M24x1, -105	601166V
07	Aerator, M24x1, -102	601255V
07	Aerator, M24x1, -104	601434V
08	Bottom seal	1002371V
09	Nipple	159684