
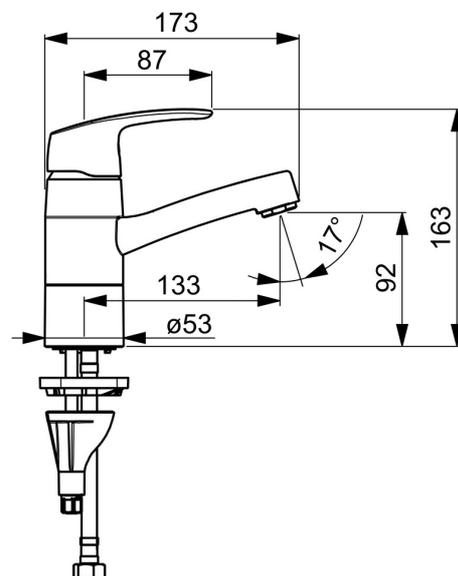
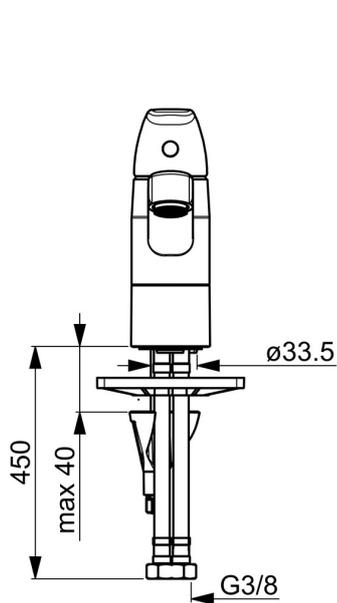


EAN: 6414150099113
static.oras.com/1015F-106

Washbasin faucet. Swivel spout (125 mm) and aerator. Spout's swing angle is factory preset at 120° (can be limited to 40°-80°). There are also in-built limitation options for water temperature and maximum flow-rate.
 F=with flexible pipes.

- ECO Building
- Single-lever
- Deck mounted
- Chrome
- Swivel spout
- Standard aerator
- Single operating lever/handle, Hot/Cold symbols
- Limitation option for maximum temperature and flow-rate
- ø 40 mm ceramic cartridge for flow and temperature control
- Flexible inlet pipes
- 3S-installation system for safe and simple mounting

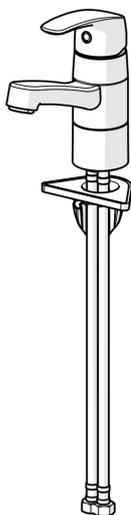

Technical data

Flow properties

Flow-rate at 300 kPa (with flow controller)	0.1 l/s
Pressure loss with flow (0.1 l/s)	200 kPa

Technical properties

Hot water supply	max. +70°C
Working pressure	50 - 1000 kPa
Connection size	G3/8
Projection	133 mm
Backflow prevention (EN1717)	AA
Material	Brass
Spout swivel range	120° (40° - 80°)

Regulations


EN standard	EN 817
Noise class	I (ISO 3822)

Approvals and Declarations


STF certificate	EUFI29-22005194-TH
KIWA SE	1490
Declaration of conformity	DoC
EPD	S-P-06391

Sustainability

EPD module A1 (kg CO2 eq.)	7,83
EPD module A2 (kg CO2 eq.)	0,37
EPD module A3 (kg CO2 eq.)	0,74
EPD module A1-A3 (kg CO2 eq.)	8,95
EPD module A4 (kg CO2 eq.)	0,25
EPD module B7 (kg CO2 eq.)	1854,00
EPD module C2 (kg CO2 eq.)	0,02
EPD module C3 (kg CO2 eq.)	0,02
EPD module C4 (kg CO2 eq.)	0,07
EPD module D (kg CO2 eq.)	-6,36

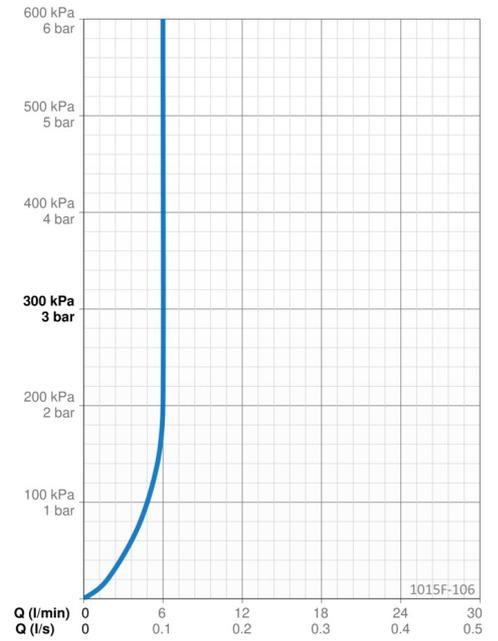

Spare parts

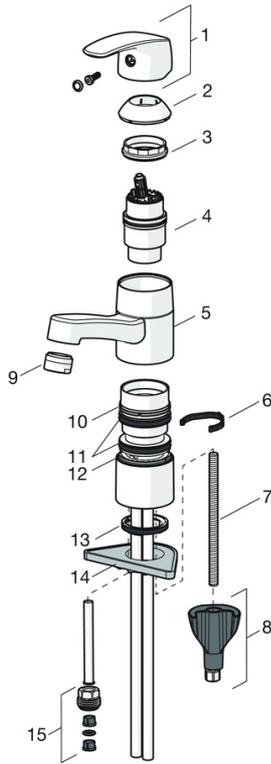

SP1021

	Name	Code
01	Lever	602502V
02	Covering cap	602589V
03	Tightening nut, M42x1.5, SW 38	158726
04	Cartridge	158890
04	Cartridge, Green building	600979V
05	Spout, L=132	602520V
06	Spout overturning stopper, 120°	1001406/10
06	Spout overturning stopper, 40°-80°	1002207/10
07	Fixing screw, M8x1, L=130	1000780V
08	Fixing set	602610V
09	Aerator, M24x1, 6 l/min	199266V
09	Aerator, M24x1 STD HC A	232211
10	Bearing ring	601097/10
11	X-sealing set	158735
12	Bearing ring	159423/10
13	Bottom seal	1002371V
14	Supporting plate, 100x60mm	158825
15	Nipple	159684