
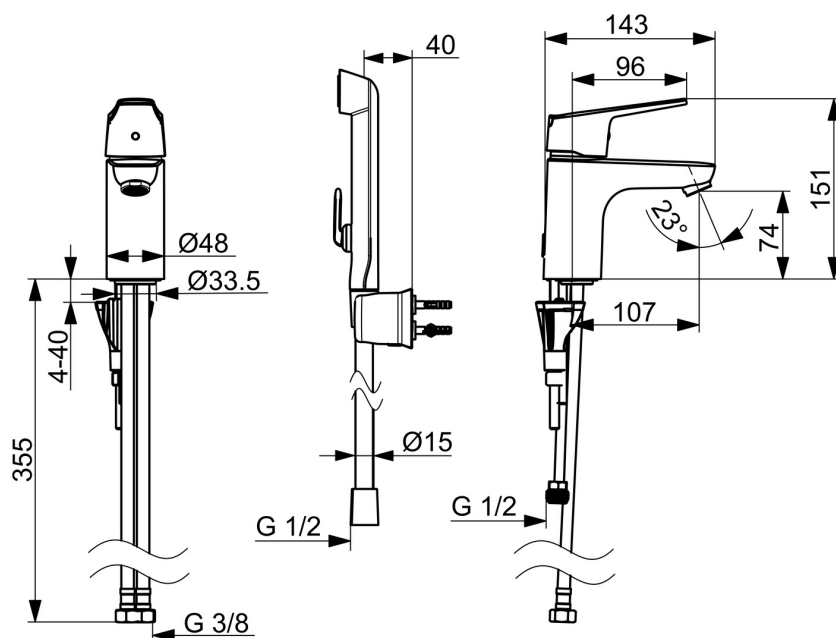


- Washbasin
- Single-lever, Bidetta
- Deck mounted
- Matt black
- Fixed spout
- Standard aerator
- Eco feature for water flow, Hot/Cold symbols, Safety feature for water temperature, Single operating lever/handle
- Hand shower, Shower holder, Shower hose (1750 mm)
- Bidetta hand shower
- Limitation option for maximum temperature and flow-rate
- ø 40 mm ceramic cartridge for flow and temperature control
- Flexible inlet pipes
- 3S-installation system for safe and simple mounting
- 1 spray function

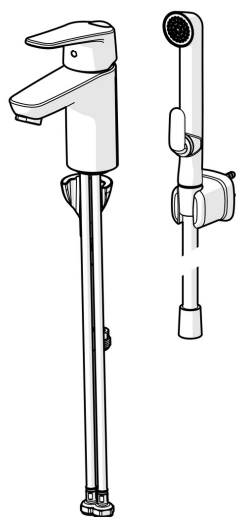

Technical data

Flow properties

Eco-flow at 300 kPa	0.09 l/s
Flow-rate at 300 kPa	0.13 l/s
Pressure loss with flow (0.1 l/s)	195 kPa

Technical properties

Hot water supply	max. +70°C
Working pressure	50 - 1000 kPa
Connection size	G3/8
Projection	107 mm
Backflow prevention (EN1717)	HC
Material	Brass

Regulations


EN standard	EN 817, EN 1113
Noise class	I (ISO 3822)

Approvals and Declarations

STF certificate	EUFI29-20000935-TH1
Declaration of conformity	DoC
EPD	S-P-06391

Sustainability


EPD module A1 (kg CO2 eq.)	8,00
EPD module A2 (kg CO2 eq.)	0,38
EPD module A3 (kg CO2 eq.)	0,76
EPD module A1-A3 (kg CO2 eq.)	9,14
EPD module A4 (kg CO2 eq.)	0,25
EPD module B7 (kg CO2 eq.)	1668,60
EPD module C2 (kg CO2 eq.)	0,02
EPD module C3 (kg CO2 eq.)	0,02
EPD module C4 (kg CO2 eq.)	0,07
EPD module D (kg CO2 eq.)	-6,50

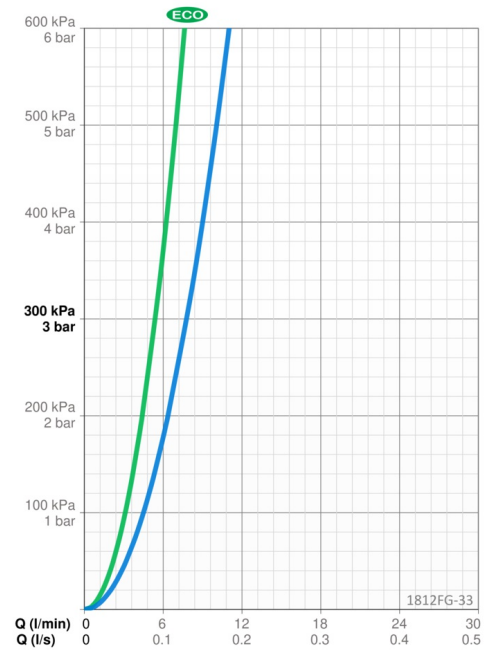

Spare parts

SP0035

	Name	Code
01	Shutter sealing (10 pcs)	249302/10
02	Strainer with O-rings	249690

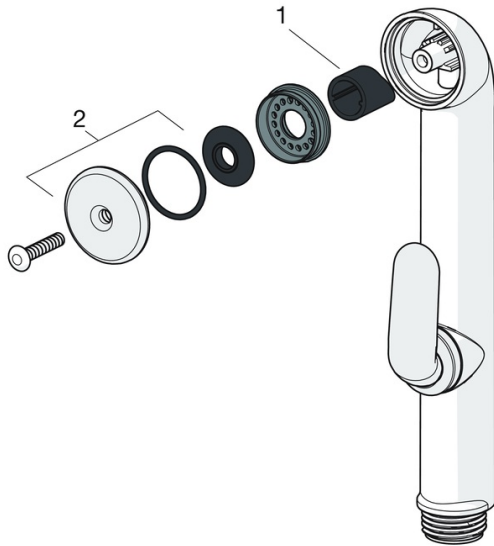

SP1812FG-33

	Name	Code
01	Lever Matt black	1000935V-33
02	Limiter	1004821V
04	Tightening nut, M42x1.5, SW 38	158726
05	Cartridge	158890
06	Fixing screw, M8x1, L=130	1000780V
07	Fixing set	602610V
09	Bottom seal	1002371V
10	Nipple	159684
N.I.	Plug	117929/10
N.I.	Holder	1002369V

