



2611FHZ-33 ORAS OPTIMA STYLE HYBRID WASHBASIN FAUCET, 3 V, BLUETOOTH

HYBRID, BATTERY-OPERATED, BLUETOOTH®

EAN: 6414150102530 static.oras.com/2611FHZ-33

When great design becomes an attraction of its own, you know it will make a difference in your life. Besides bringing beauty to life, this new classic is also designed to bring any modern bathroom to the next level.

A hybrid faucet offers more flexibility and freedom of use: the user can choose whether they want to wash their hands with the touchless function without touching the lever - or whether they want to open the faucet traditionally with the lever. The hybrid faucet offers more convenience and flexibility in use and is also a sustainable choice: the touchless function consumes less water and energy. Slender design and graceful shapes make this faucet the highlight of any space.

Double Comfort

High quality
Sleek design
Anti-limescale rubber aerator for easy cleaning
Bluetooth®
Made in Europe

Perfect fit for any bathroom

- Deck mounted
- Matt black
- Swivel spout
- Standard aerator, PCA® - constant flow rate regardless of pressure variations
- Single operating lever/handle, Pin shape, Hot/Cold symbols
- Limitation option for maximum temperature and flow-rate, Adjustable hot water stop (included, retrofittable)
- ø 30 mm ceramic cartridge for flow and temperature control
- Infrared sensor, Solenoid valve, Low battery indicator
- Flexible inlet pipes
- Inner body made of DZR brass
- Without pop-up waste

TECHNICAL DATA

FLOW PROPERTIES

Flow-rate at 300 kPa (with flow controller)	0.1 l/s
Pressure loss with flow (0.1 l/s)	195 kPa

TECHNICAL PROPERTIES

Hot water supply	max. +70°C
Working pressure	100 - 1000 kPa
Connection size	G3/8
Projection	147 mm
Backflow prevention (EN1717)	EB
Material	Brass


SOFTWARE SETTINGS

Automatic flush	off (off/1-120 h)
Automatic flush period	30 s (1-1800 s)
Max. flow period	10 s (1-1800s)

ELECTRONIC PROPERTIES

Battery	AA 1.5 V Lithium x 2
Bluetooth version	5.x (D060576)

SPARE PARTS

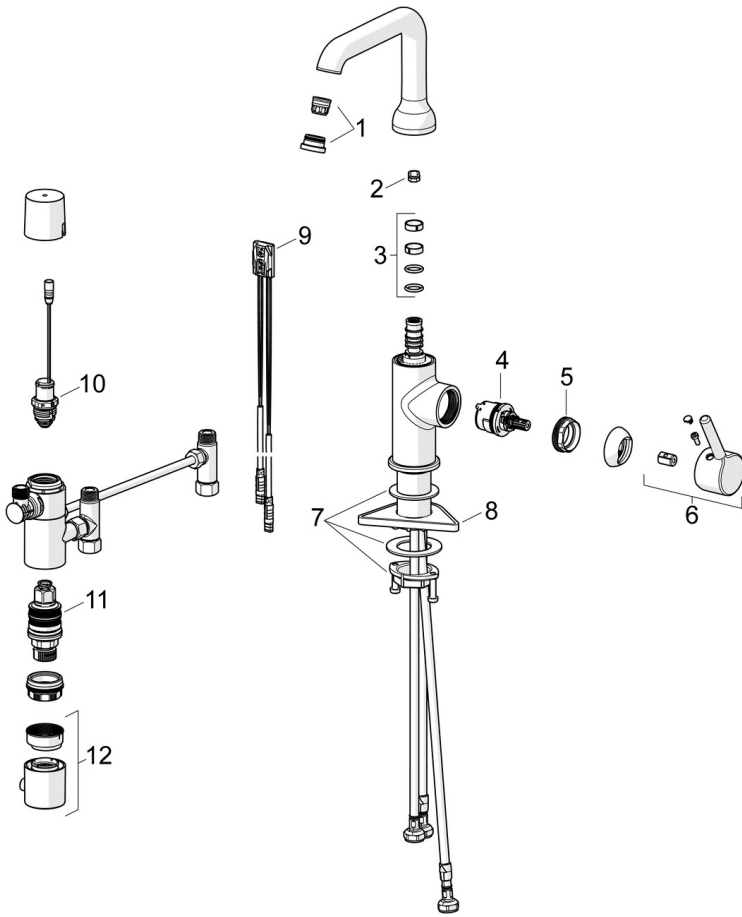

SP2617FHZ-33

	Name	Code
01	Aerator and key, PCA 1.5 gpm Matt black	1012273V-33
02	Spout overturning stopper, 120°	159670/10
03	Sealing kit for spout	198287V
04	Cartridge, 3.0	1014428V
05	Tightening nut, M34x1.5, SW30	1012133V
06	Lever Matt black	1001748V-33
07	Fixing set	602629V
08	Supporting plate, 100x60mm	158825
09	Sensor, 3/9 V, Bluetooth	1014212V
10	Pilot valve, 3 V	601884V-F
11	Thermostatic cartridge	178780V
12	Temperature control handle Chrome	602062V
N.I.	Battery, (2x) 1.5 V AA Lithium	600599V