

EAN: 6414150107689
static.oras.com/2613FH-33




When great design becomes an attraction of its own, you know it will make a difference in your life. Besides bringing beauty to life, this new classic is also designed to bring any modern bathroom to the next level. Remote bidetta for improve usage, just lift handle and water will flow. Slender design and graceful shapes make this faucet the highlight of any space.

High quality
 Sleek design
 Anti-limescale rubber aerator for easy cleaning
 Intuitive Remote Bidetta solution
 Made in Europe

Perfect fit for any bathroom

- Washbasin
- Single-lever, Bidetta, Battery-operated, Bluetooth®
- Deck mounted
- Matt black
- Fixed spout
- Standard aerator, PCA® - constant flow rate regardless of pressure variations
- Single operating lever/handle, Pin shape, Hot/Cold symbols
- Hand shower, Shower holder, Shower hose (1750 mm)
- Remote-operated Smart Bidetta
- Limitation option for maximum temperature and flow-rate, Adjustable hot water stop (included, retrofittable)
- ø 30 mm ceramic cartridge for flow and temperature control
- Solenoid valve
- Flexible inlet pipes
- Inner body made of DZR brass
- Without pop-up waste
- 1 spray function

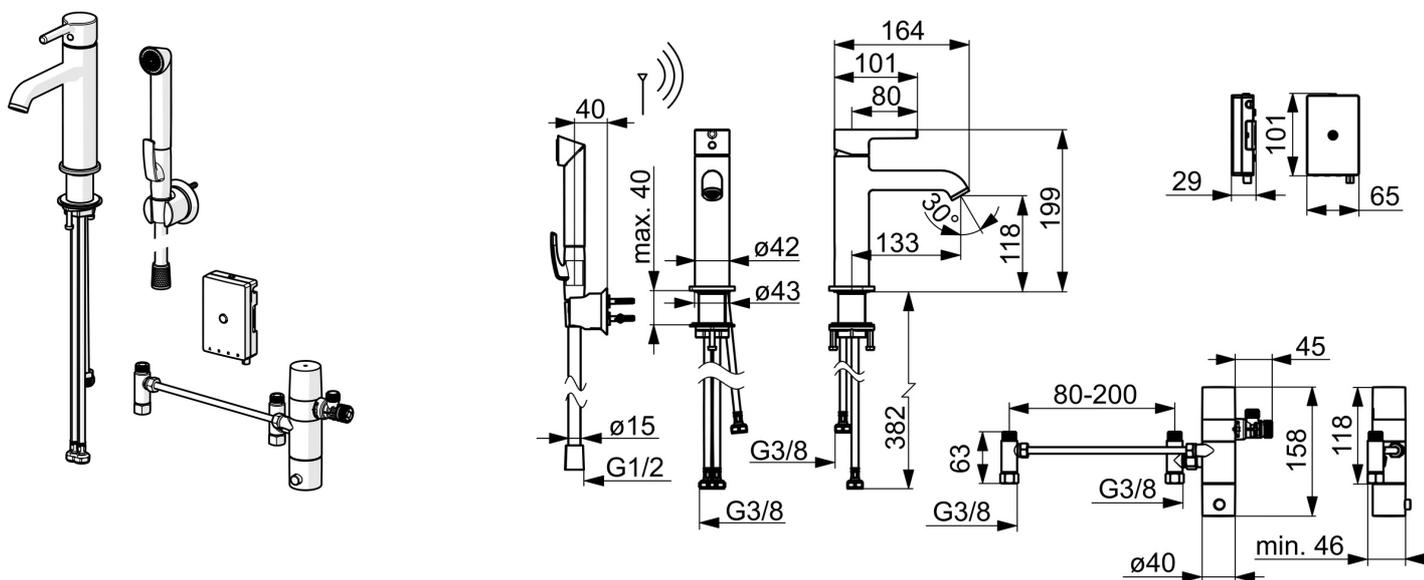



Technical data

Flow properties

Flow-rate at 300 kPa (with flow controller)	0.1 l/s
Pressure loss with flow (0.1 l/s)	195 kPa

Technical properties

Hot water supply	max. +70°C
Working pressure	100 - 1000 kPa
Connection size	G3/8
Projection	133 mm
Backflow prevention (EN1717)	EB
Material	Brass

Software settings

Automatic flush	off (off/1-120 h)
Automatic flush period	30 s (1-1800 s)

Electronic properties


Battery	AA 1.5 V Lithium x 2, CR 2450 3 V
Bluetooth version	5.x (D060577)

Regulations


EU Directives	CE Radio Equipment Directive 2014/53/EU , Low Voltage Directive 2014/35/EU , EMC Directive 2014/30/EU , RoHS Directive 2011/65/EU
EN standard	EN 817, ETSI EN 301 489-1 V1.9.2 , ETSI EN 300 328 v2.2.2, EN 18031-1, EN 61000-6-1:2007 , EN 61000-6-3:2007+A1:2011+AC:2012 , EN 60335- 1:2012+A11+A13+A14+A14+A2+A15:2021, Part 19.11.4
Noise class	I (ISO 3822)
Protection class	IP 55

Approvals and Declarations

STF certificate	EUFI29-23002169-TH1
Declaration of conformity	RED

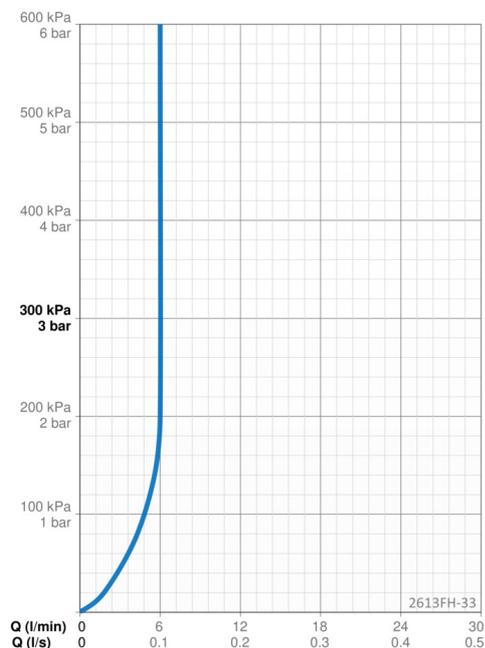

Spare parts

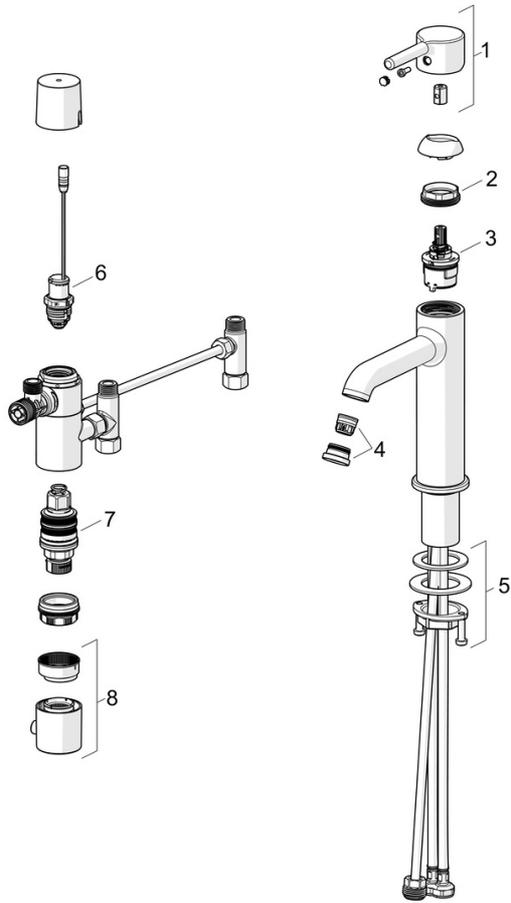

SP2613FH-33

	Name	Code
01	Lever Matt black	1012011V-33
02	Tightening nut, M34x1.5, SW30	1012133V
03	Cartridge, 3.0	1014428V
04	Aerator and key, PCA 1.5 gpm Matt black	1012273V-33
05	Fixing set	602629V
06	Pilot valve, 3 V	601884V-F
07	Thermostatic cartridge	178780V
08	Temperature control handle	602062V