



2738F ORAS OPTIMA SEMIPRO KITCHEN FAUCET

SINGLE-LEVER, SIDE OPERATED

EAN: 6414150079566 static.oras.com/2738F



Kitchen faucet with operated easy-grip lever, flexible high swivel spout and aerator. Spout's swing angle is factory preset at 120° (can be limited to 60° or 80°).

F = with flexible pipes

- Deck mounted
- Chrome
- Swivel spout, Flexible model, Swivel range limiting option
- Easy-Grip surface, Single operating lever/handle, Hot/Cold symbols
- Normal - Even and soft water stream, Intense - invigorating water stream
- Limitation option for maximum temperature and flow-rate
- ø 40 mm ceramic cartridge for flow and temperature control, Litter filter(s)
- Flexible inlet pipes
- Inner body made of DZR brass, Surfaces in contact with drinking water contain less than 0.3% lead, Waterways without nickel coating
- 2 spray functions

TECHNICAL DATA

FLOW PROPERTIES

Flow-rate at 300 kPa	0.2 l/s
Pressure loss with flow (0.2 l/s)	300 kPa

TECHNICAL PROPERTIES



DN-size (nominal dimension)	DN15
Hot water supply	max. +70°C
Working pressure	100 - 1000 kPa
Connection size	G3/8
Projection	200 mm
Backflow prevention (EN1717)	AA
Material	Brass/Composite

REGULATIONS


EN standard	EN 817
Noise class	I (ISO 3822) Oras lab.

APPROVALS AND DECLARATIONS

STF certificate	EUFI29-20002662-TH2
KIWA SE	1607
Declaration of conformity	DoC

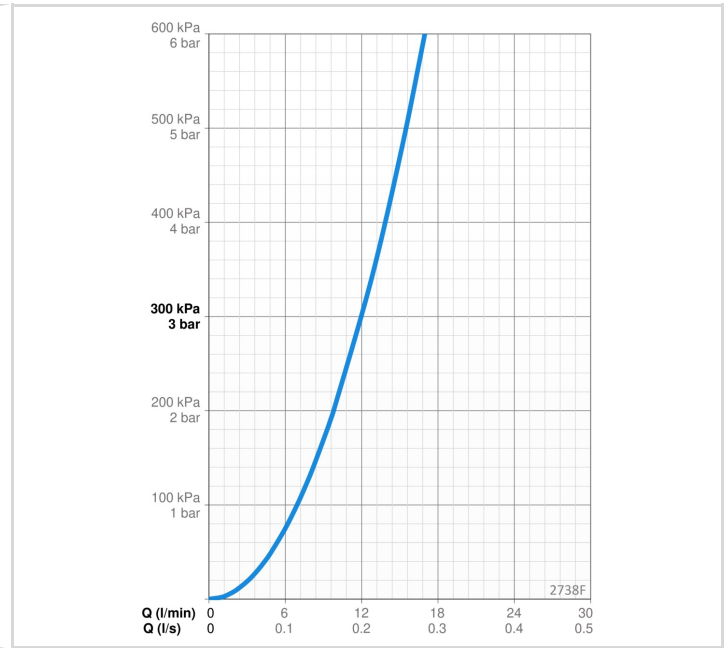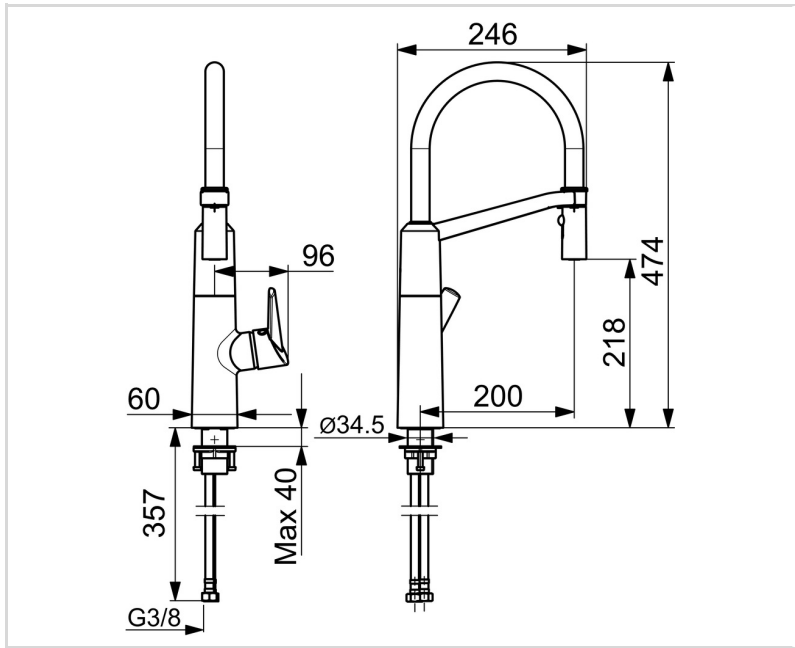

SPARE PARTS

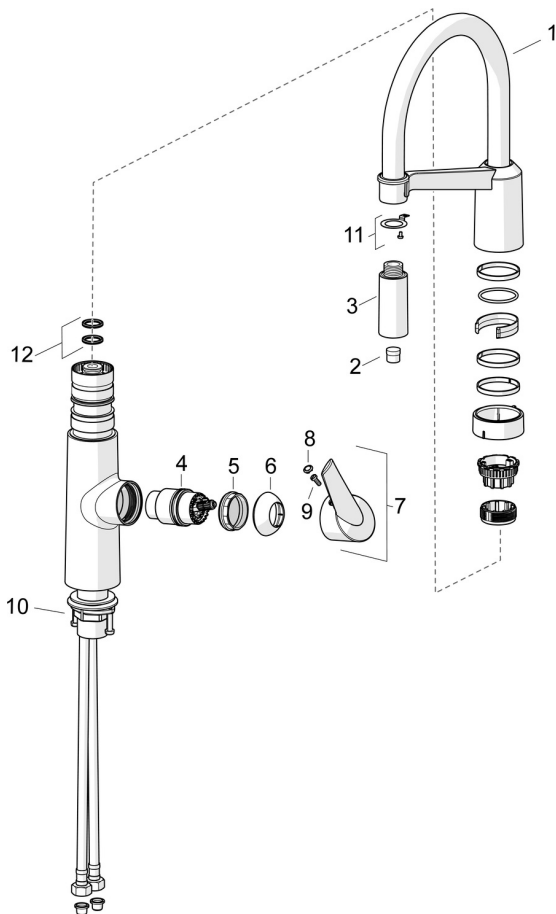

SP2738F

Name	Code
01 High spout Chrome	1002660V
02 Aerator	1000972V
03 Shower head Chrome	1001321V
04 Cartridge	158890
05 Tightening nut, M42x1.5, SW 38	158726
06 Covering cap Chrome	159053V
07 Lever	601319V
08 Symbol plug	159020/10
09 Screw set, M4x10	159248/10
10 Fixing set	602629V
11 Fixing part Discontinued	1001323V
12 Sealing kit	601072V