

2839F-Y Oras Cubista Kitchen faucet with dishwasher valve, 6 V Discontinued

EAN: 6414150071447

static.oras.com/2839F-Y






Kitchen faucet with high spout. Swivel spout, aerator and electronic dishwasher valve. Spout's swing angle is factory preset at 120° (can be limited to 0° or 60°).

Dishwasher valve closes automatically after 4 or 12 hours (one push opens the valve for 4 hours, pushing for 5 seconds opens the valve for 12 hours). Battery operated, 6 V.

F = with flexible pipes

- Kitchen
- Single-lever, Battery-operated, Dishwasher valve
- Deck mounted
- Chrome
- Swivel spout, Swivel range limiting option
- Standard aerator
- Electronic stop valve for external equipment
- Single operating lever/handle, Hot/Cold symbols
- Limitation option for maximum temperature and flow-rate
- Litter filter(s), ø 40 mm ceramic cartridge for flow and temperature control
- Solenoid valve, Light indicated function(s), Low battery indicator
- Flexible inlet pipes

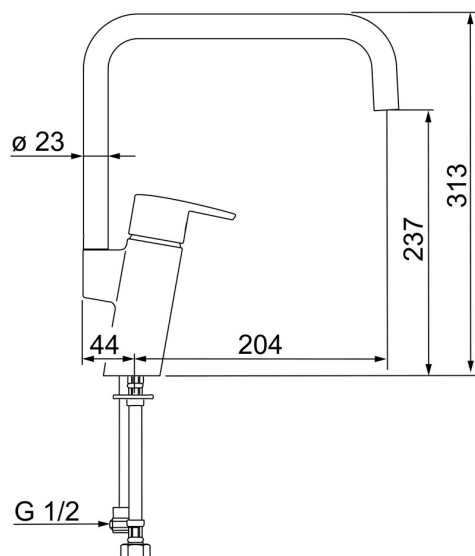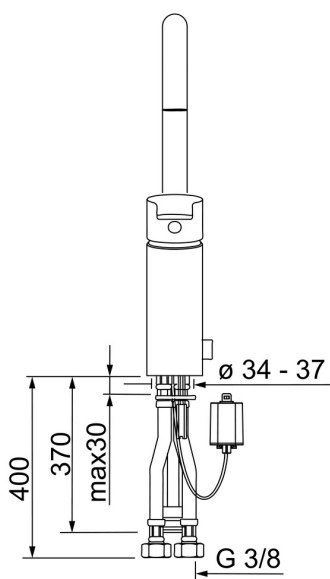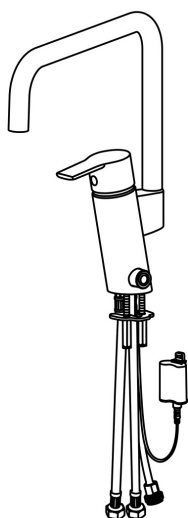



Technical data

Flow properties

Flow-rate at 300 kPa	0.2 l/s
Pressure loss with flow (0.2 l/s)	300 kPa

Technical properties

Hot water supply	max. +70°C
Working pressure	50 - 1000 kPa
Connection size	G3/8
Projection	204 mm
Backflow prevention (EN1717)	AA
Material	Brass
Spout swivel range	120° (60° / 0°)

Software settings

Dishwasher valve open period	4 h / 12 h
------------------------------	------------

Electronic properties


Battery	Lithium 2CR5 6 V
---------	------------------

Regulations


EU Directives	C € EMC Directive 2014/30/EU , RoHS Directive 2011/65/EU
EN standard	EN 15091 , EN 817, ETSI EN 301 489-1 V1.9.2 , ETSI EN 300 328 v2.2.2 , EN 61000-6-1:2007 , EN 61000-6-3:2007+A1:2011+AC:2012 , EN 60335-1:2012+A11+A13+A14+A2+A15:2021, Part 19.11.4
Noise class	I (ISO 3822)
Protection class	IP 55

Approvals and Declarations

STF certificate	EUF129-22005212-TH
UN38.3	UN38-3 Maxell 2CR5
Declaration of conformity	EMC

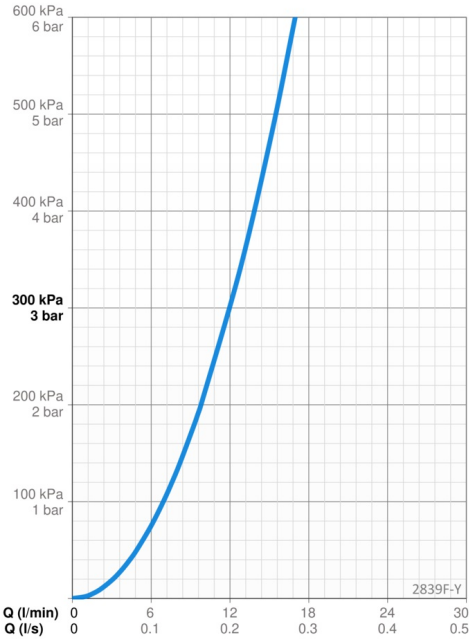

Spare parts

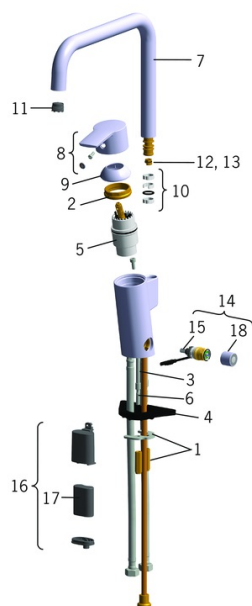

SP2839F-Y

	Name	Code
01	Fixing plates with nuts	158697
02	Tightening nut, M42x1.5, SW 38	158726
03	Fixing screw, M6x65 Discontinued	158747/10
04	Supporting plate, 100x60mm	158825
05	Cartridge	158890
06	Extension screw kit, M6	158893
07	High spout	601597V
08	Lever	159050V
09	Covering cap	159053V
10	Sealing kit	159499
11	Aerator and key, M18.5x1	859338V
12	Spout overturning stopper, 120°	159670/10
13	Spout overturning stopper, 60°/0°	159667V
13	Spout overturning stopper, 60°/0°	159667/10
14	Solenoid valve	600047V
15	Litter filter	600038V
16	Battery casing, 2CR5 6 V	199417V
17	Lithium battery, 2CR5 6 V	198330
18	Cap	600093V