



Thermostatic rain shower faucet with spout, fixed head shower pipe, rain shower and soap holder.

- Wall mounted
- Chrome
- Temperature control handle, Flow control handle
- Soap dish, Overhead shower, Rotatable ball joint connection
- Rain - Even and strong water stream
- Thermostatic cartridge for automatic temperature control, Litter filter(s), Non-return valve(s), Ceramic head part for flow control
- 1 spray function

TECHNICAL DATA

FLOW PROPERTIES


Flow-rate at 300 kPa	0.23 l/s
Pressure loss with flow (0.2 l/s)	230 kPa

TECHNICAL PROPERTIES

Hot water supply	max. +80°C
Working pressure	100 - 1000 kPa
Connection size	G3/4
Installation width	150 ± 3 mm
Backflow prevention (EN1717)	EB
Material	Brass

REGULATIONS

EN standard	EN 1111
Noise class	I (ISO 3822)

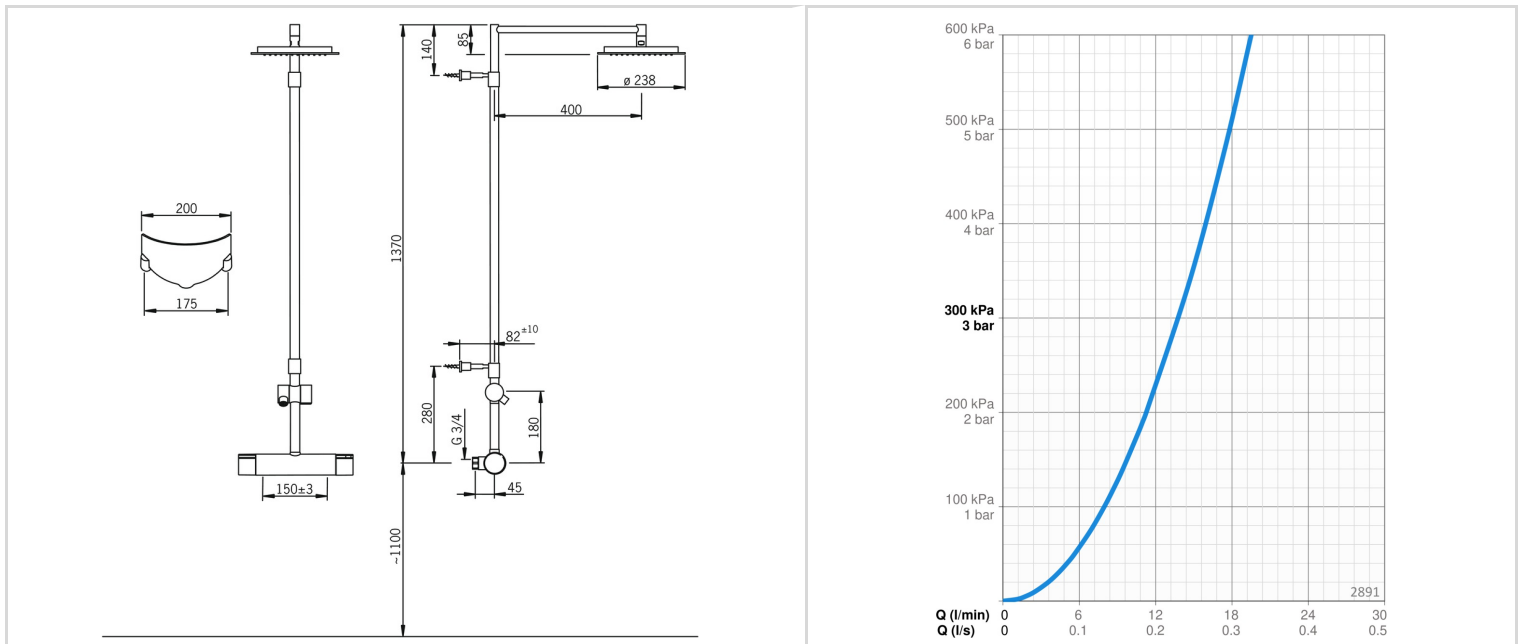



SP2891

	Name	Code
01	Flow control handle	159045V
02	Headpart Chrome	109898
03	Filter sealing, G3/4, DN20	178375V
04	O-ring kit	178796V
05	Temperature control handle	159048V
06	Thermostatic cartridge	178780V
07	Diverter	600358V
08	Aerator, M21.5x1 B Discontinued	600359V