

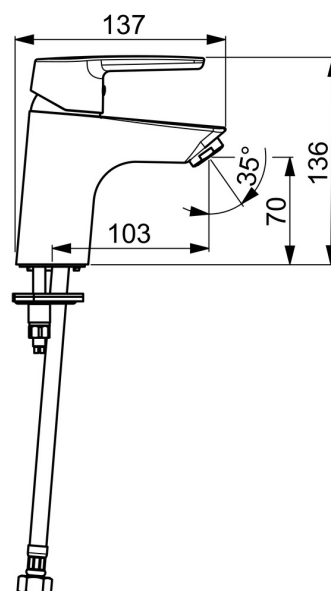


EAN: 6414150077784
static.oras.com/3910F

Washbasin faucet with fixed spout and aerator. There are also in-built limitation options for water temperature and maximum flow-rate. Flow controller 6.0 l/min. F= with flexible pipes

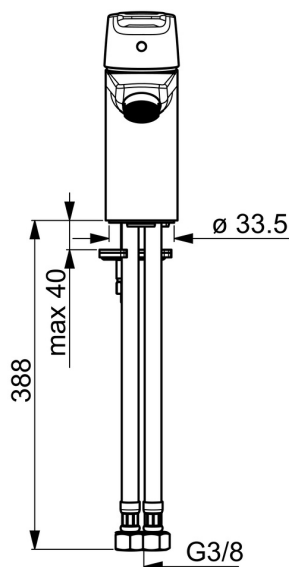

- Washbasin
- Single-lever
- Deck mounted
- Chrome
- Fixed spout
- Standard aerator
- Single operating lever/handle, Hot/Cold symbols
- Chain holder without chain
- Limitation option for maximum temperature and flow-rate
- ø 35 mm ceramic cartridge for flow and temperature control
- Flexible inlet pipes
- Rapid installation system





Technical data

Flow properties

Flow-rate at 300 kPa (with flow controller)	0.1 l/s
Pressure loss with flow (0.1 l/s)	200 kPa

Technical properties

Hot water supply	max. +70°C
Working pressure	50 - 1000 kPa
Connection size	G3/8
Projection	103 mm
Material	Brass

Regulations


EN standard	EN 817
Noise class	I (ISO 3822) Oras lab.

Approvals and Declarations


KIWA SE	1413
Declaration of conformity	DoC
EPD	S-P-06391

Sustainability

EPD module A1 (kg CO2 eq.)	5,10
EPD module A2 (kg CO2 eq.)	0,24
EPD module A3 (kg CO2 eq.)	0,48
EPD module A1-A3 (kg CO2 eq.)	5,83
EPD module A4 (kg CO2 eq.)	0,16
EPD module B7 (kg CO2 eq.)	1854,00
EPD module C2 (kg CO2 eq.)	0,01
EPD module C3 (kg CO2 eq.)	0,01
EPD module C4 (kg CO2 eq.)	0,05
EPD module D (kg CO2 eq.)	-4,14

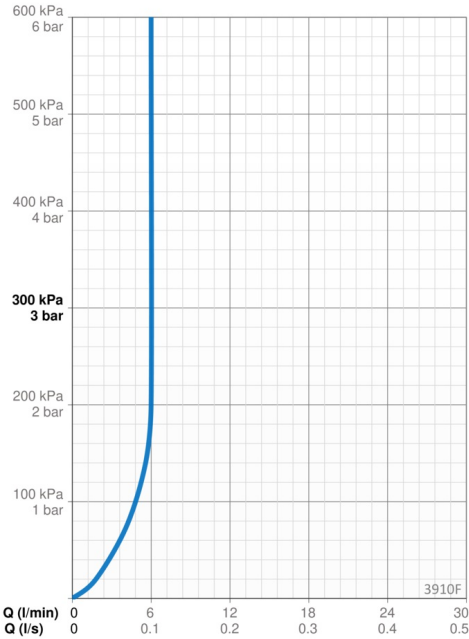

Spare parts

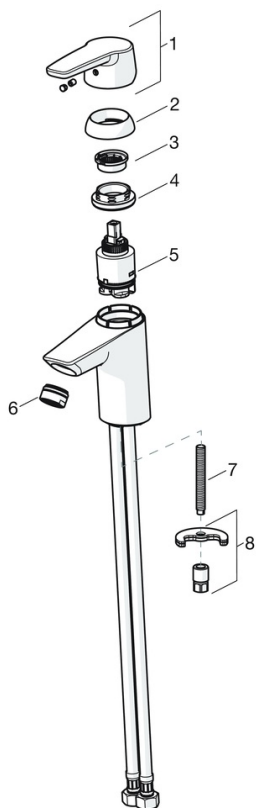

SP3910F

	Name	Code
01	Long lever	201078
01	Lever	1000801V
02	Covering cap	601967V
03	Temperature adjustment limiter Discontinued	601973V
04	Tightening nut, M40x1	1003409V
05	Cartridge, 3.5 Classic	601969V
06	Aerator, M24x1, 6 l/min	601974V
07	Fixing screw, M8x1, L=140	601970V
08	Fixing set	601985V