

EAN: 6414150104664  
[static.oras.com/4793-33](http://static.oras.com/4793-33)



Oras Aurelia A Harmony of Simplicity and Elegance.

The design of Oras Aurelia is characterized by pure, fluid shapes—timeless in their simplicity yet subtly complex in execution. This results in a delicate dance between the straightforward and the intricate, visually capturing nature's own balance.



Stand beneath the cascading water to experience a symphony of sensations, as clever design ensures efficient water distribution, embracing the complete body in refreshing and rejuvenating comfort.

Elevate your daily ritual with Oras Aurelia, where every drop becomes a celebration of inherent beauty.

1-spray, Ø300 overhead shower  
 3-spray Ø110 hand shower  
 1750mm hose

## ELEVATING YOUR MOMENTS

- Shower solutions
- Thermostatic
- Wall mounted
- Matt black
- Fixed spout
- Standard aerator
- Temperature control handle, Flow control handle, Hot/Cold symbols, Eco feature for water flow
- Turn operated diverter, Integrated into flow control handle
- Hand shower, Shower rail, Swivel overhead shower, Lockable in the middle position, Adjustable shower rail bracket, Shower hose (1750 mm), Variable fixing points, Rotatable ball joint connection, Anti limescale technology (easy to clean), Twist guard for shower hose
- Pulsating - Strong water stream for massage or body treatment, Intense - invigorating water stream, Relaxing - Soft water stream, pleasant for entire body
- Safety stop against scalding at 38°C, The housing of the fittings conducts minimal heat
- Ceramic head part for flow control, Thermostatic cartridge for automatic temperature control, Non-return valve(s), Litter filter(s)
- Direct connection, Internal thread, Cover plate(s)
- Flexible length / can be shortened, Anti-twist hose connector
- 3 spray functions

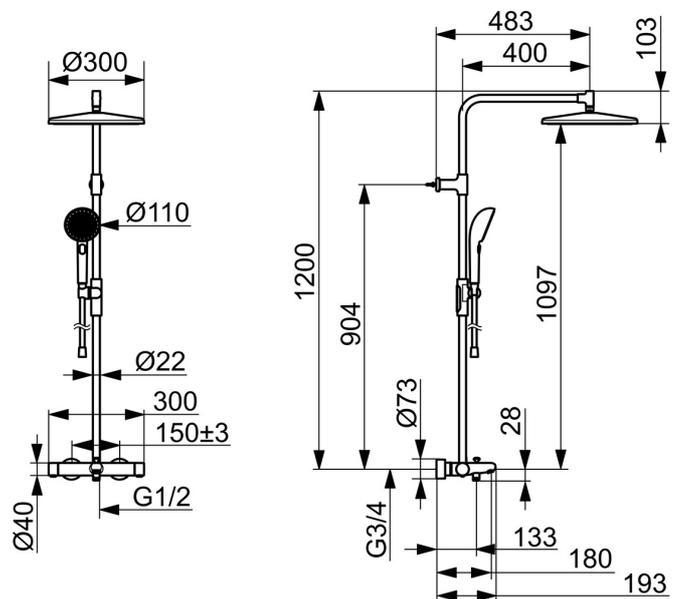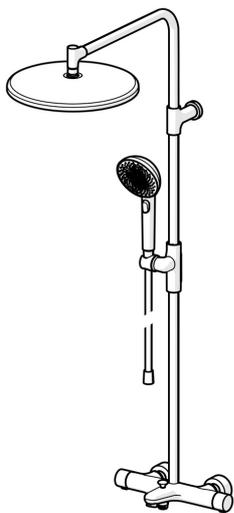

## Technical data

### Flow properties

Eco-flow at 300 kPa	<b>0.16 l/s</b>
Flow-rate at 300 kPa	<b>0.17/0.32 l/s</b>
Pressure loss with flow (0.2 l/s)	<b>195 kPa</b>
Pressure loss with flow (0.3 l/s)	<b>270 kPa</b>

### Technical properties

Hot water supply	<b>max. +65°C</b>
Working pressure	<b>100 - 1000 kPa</b>
Connection size	<b>G3/4</b>
Installation width	<b>150 ± 3 mm</b>
Projection	<b>180 mm</b>
Backflow prevention (EN1717)	<b>EB</b>
Material	<b>Brass/Composite</b>

### Regulations


EN standard	<b>EN 1111, EN 1112, EN 1113</b>
Noise class	<b>I (ISO 3822)</b>

### Approvals and Declarations


Declaration of conformity	<b>DoC</b>
EPD	<b>S-P-07819</b>

### Sustainability

EPD module A1 (kg CO2 eq.)	<b>22,73</b>
EPD module A2 (kg CO2 eq.)	<b>1,17</b>
EPD module A3 (kg CO2 eq.)	<b>2,40</b>
EPD module A1-A3 (kg CO2 eq.)	<b>26,32</b>
EPD module A4 (kg CO2 eq.)	<b>0,69</b>
EPD module B7 (kg CO2 eq.)	<b>1852,80</b>
EPD module C2 (kg CO2 eq.)	<b>0,05</b>
EPD module C3 (kg CO2 eq.)	<b>0,05</b>
EPD module C4 (kg CO2 eq.)	<b>1,44</b>
EPD module D (kg CO2 eq.)	<b>-17,20</b>

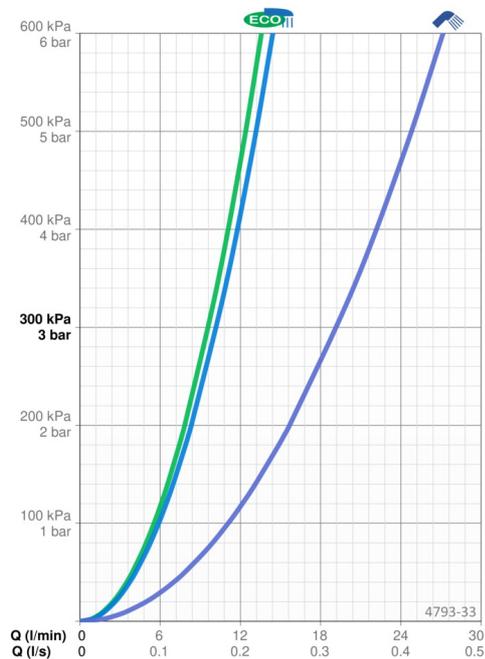

## Spare parts

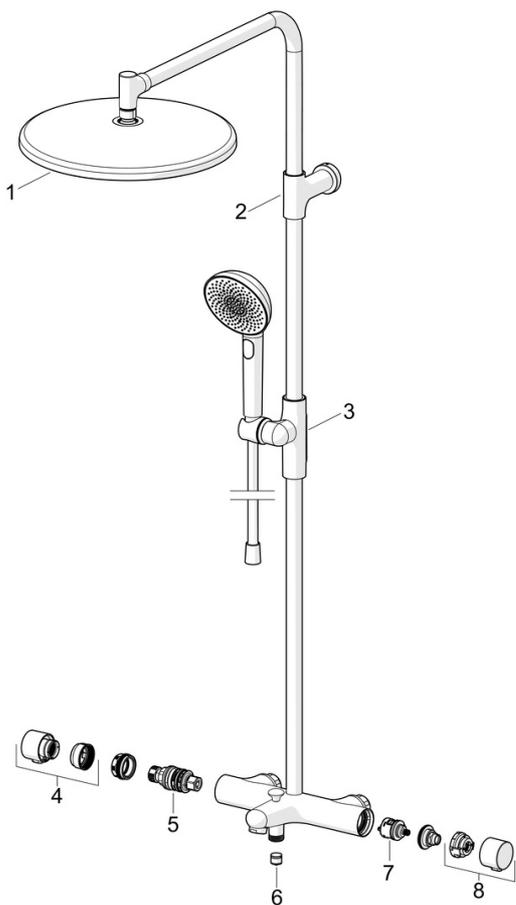

### SP4793CLR

	Name	Code
01	Overhead shower, d 300 mm Matt black	1018483V-33
01	Overhead shower, d 300 mm Brushed steel	1018483V-80
01	Overhead shower, d 300 mm Brushed bronze	1018483V-81
02	Wall bracket Matt black	1019745V-33
02	Wall bracket Brushed steel	1019745V-80
02	Wall bracket Brushed bronze	1019745V-81
03	Slide for shower rail Matt black	1018479V-33
03	Slide for shower rail Brushed steel	1018479V-80
03	Slide for shower rail Brushed bronze	1018479V-81
04	Temperature control handle Matt black	1018476V-33
04	Temperature control handle Brushed steel	1018476V-80
04	Temperature control handle Brushed bronze	1018476V-81
05	Thermostatic cartridge	178780V
06	Non-return valve, DW15/DN10K	1018484V
07	Diverter	198282V
08	Flow control handle Matt black	1018477V-33
08	Flow control handle Brushed steel	1018477V-80
08	Flow control handle Brushed bronze	1018477V-81