



EAN: 6414150087851

static.oras.com/5711F



Oras Care washbasin faucet with fixed spout. Ergonomic lever offers good usability to all users and situations. In-built limitation options for water temperature and maximum flow-rate. Flexible connection pipes G3/8".

- Washbasin
- Health & Care
- Single-lever
- Deck mounted
- Chrome
- Fixed spout
- Standard aerator
- Long shape, Single operating lever/handle, Hot/Cold symbols
- Limitation option for maximum temperature and flow-rate
- ø 40 mm ceramic cartridge for flow and temperature control
- Flexible inlet pipes
- Inner body made of DZR brass, 3S-installation system for safe and simple mounting

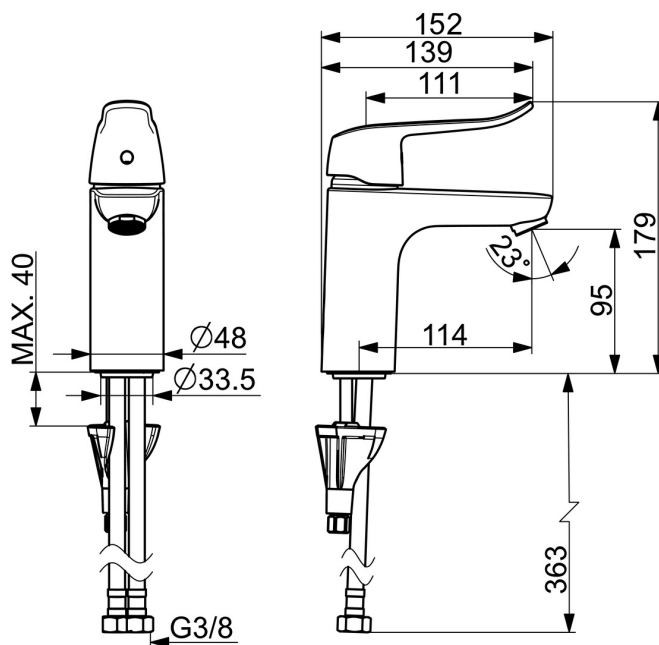



Technical data

Flow properties

Flow-rate at 300 kPa	0.18 l/s
Pressure loss with flow (0.1 l/s)	95 kPa

Technical properties

Hot water supply	max. +70°C
Working pressure	50 - 1000 kPa
Connection size	G3/8
Projection	114 mm
Backflow prevention (EN1717)	AA
Material	Brass

Regulations


EN standard	EN 817
Noise class	I (ISO 3822)

Approvals and Declarations


STF certificate	EUF129-20003722-TH
KIWA SE	1588
Declaration of conformity	DoC
EPD	S-P-06391

Sustainability

EPD module A1 (kg CO2 eq.)	7,25
EPD module A2 (kg CO2 eq.)	0,35
EPD module A3 (kg CO2 eq.)	0,69
EPD module A1-A3 (kg CO2 eq.)	8,29
EPD module A4 (kg CO2 eq.)	0,23
EPD module B7 (kg CO2 eq.)	3337,20
EPD module C2 (kg CO2 eq.)	0,01
EPD module C3 (kg CO2 eq.)	0,02
EPD module C4 (kg CO2 eq.)	0,06
EPD module D (kg CO2 eq.)	-5,89

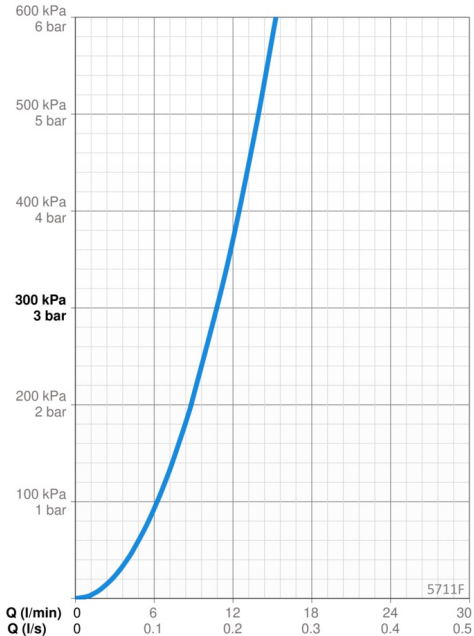

Spare parts

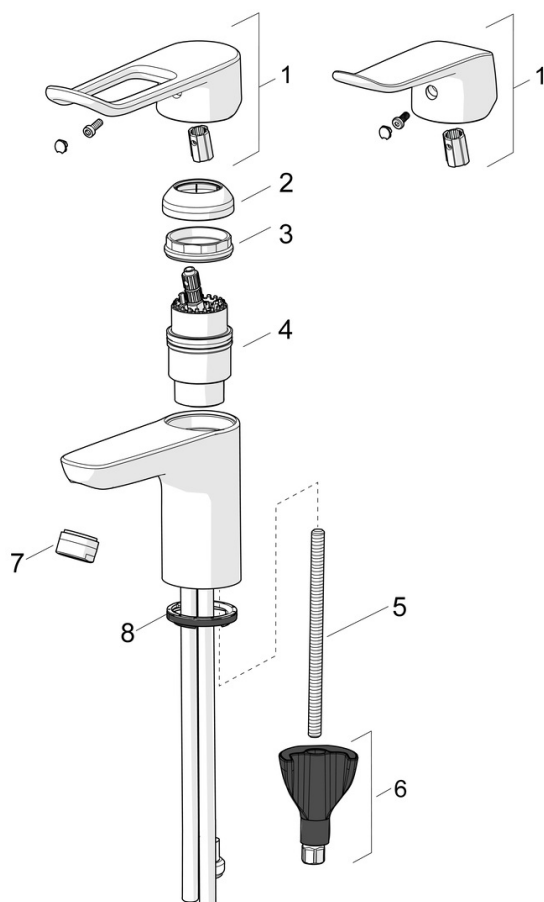

SP5611

	Name	Code
01	Long lever, L=162	1004914V
01	Lever, L=136	1005294V
02	Covering cap	1000664V
03	Tightening nut, M42x1.5, SW 38	158726
04	Cartridge	158890
05	Fixing screw, M8x1, L=130	1000780V
06	Fixing set	602610V
07	Aerator, M24x1 STD PL HC A Laminar	602283V
07	Aerator, M24x1 STD HC A	232211
08	Bottom seal	1002371V