

EAN: 6414150099779
static.oras.com/7192N-33



Designed to impress and give an elegant solution for any bathroom.

This rainshower system gives you a most comfortable and enjoyable shower experience every day. With focus on high performance while still have an eye on the aesthetics and details to secure an easy installation.

The handles are designed to be elegant while still providing a good grip for easy.



Our new developed magnetic shelf "MagShelf" completes the design while covering the connection to the wall.

The large and flat head shower has a gentle spray that covers the whole body. Enjoy the even and strong water stream for the ultimate relaxation.

Our 3-spray handshower is easy to operate with a nice designed push button to easily change the water sprays.

Elegant design and total enjoyment

- Shower solutions
- Thermostatic
- Wall mounted
- Matt black
- Temperature control handle, Flow control handle, Hot/Cold symbols, Easy-Grip surface, Eco feature for water flow
- Turn operated diverter, Integrated into flow control handle
- Hand shower, Swivel overhead shower, Lockable in the middle position, Rotatable ball joint connection, Shower rail, Variable fixing points, Anti limescale technology (easy to clean), Shower hose (1750 mm), Twist guard for shower hose, MagShelf. Removable shelf with magnetic attachment
- Normal - Even and soft water stream, Massage - Strong water stream due to rotatable spray nozzles, Rain - Even and strong water stream
- Safety stop against scalding at 38°C, The housing of the fittings conducts minimal heat
- Ceramic head part for flow control, Thermostatic cartridge for automatic temperature control, Non-return valve(s), Litter filter(s)
- Direct connection, Internal thread, Cover plate(s)
- Flexible length / can be shortened, Anti-twist hose connector
- Without couplings
- 3 spray functions

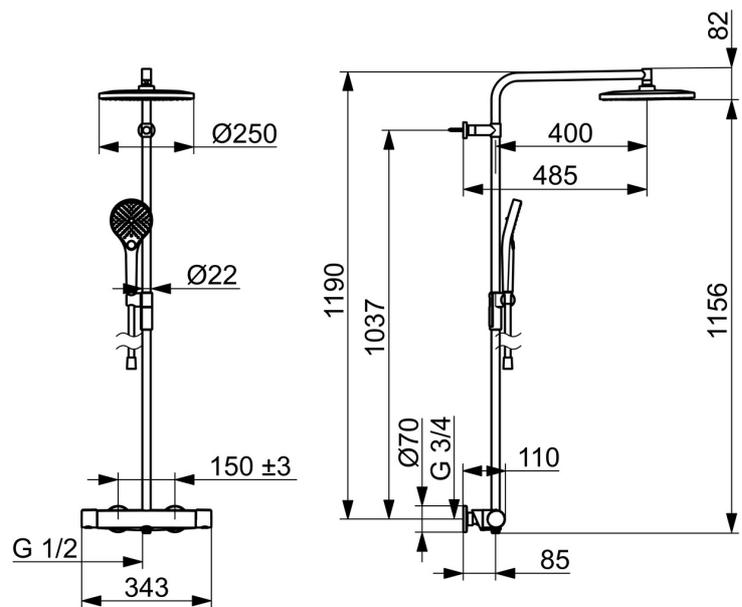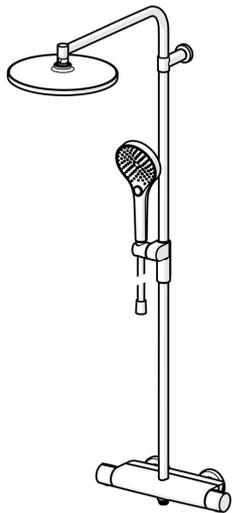

Technical data

Flow properties

Eco-flow at 300 kPa	0.12 l/s
Flow-rate at 300 kPa	0.20/0.20 l/s
Pressure loss with flow (0.2 l/s)	250 kPa

Technical properties

Hot water supply	max. +65°C
Working pressure	100 - 1000 kPa
Connection size	G3/4
Installation width	150 ± 3 mm
Backflow prevention (EN1717)	EB
Material	Brass/Composite

Regulations


EN standard	EN1111
Noise class	I (ISO 3822)

Approvals and Declarations


Declaration of conformity	DoC
EPD	S-P-07819

Sustainability

EPD module A1 (kg CO2 eq.)	22,55
EPD module A2 (kg CO2 eq.)	1,16
EPD module A3 (kg CO2 eq.)	2,38
EPD module A1-A3 (kg CO2 eq.)	26,11
EPD module A4 (kg CO2 eq.)	0,68
EPD module B7 (kg CO2 eq.)	1389,60
EPD module C2 (kg CO2 eq.)	0,05
EPD module C3 (kg CO2 eq.)	0,05
EPD module C4 (kg CO2 eq.)	1,43
EPD module D (kg CO2 eq.)	-17,07

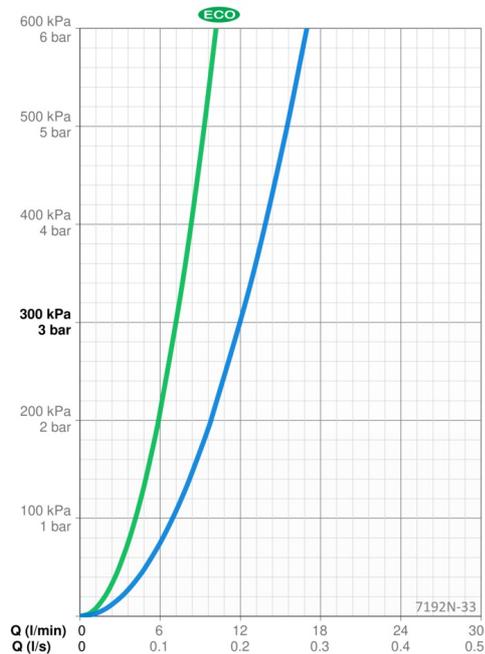

Spare parts

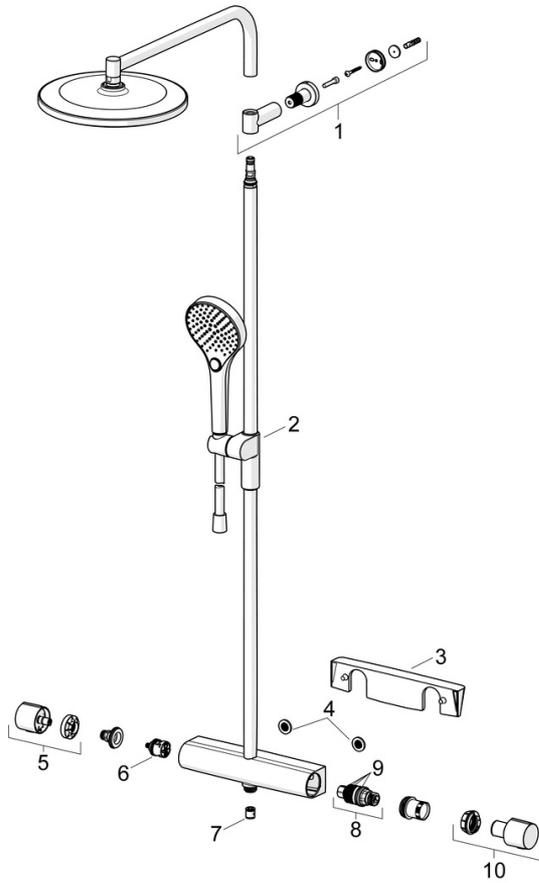

SP7192N-33

	Name	Code
01	Wall bracket Matt black	1013325V-33
02	Slide for shower rail Matt black	1012974V-33
03	Shelf Matt black	1012484V-33
04	Filter sealing, G3/4, DN20	178375V
05	Flow control handle Matt black	1006775V-33
06	Diverter	198282V
07	Non-return valve, DN15	105311
08	Thermostatic cartridge	178780V
09	O-ring kit	178796V
10	Temperature control handle Matt black	1006752V-33