

Technical data

Flow properties

Flow-rate at 300 kPa	0.25 / 0.26 l/s
Pressure loss with flow (0.2 l/s)	180 kPa

Technical properties


DN-size (nominal dimension)	DN15
Hot water supply	max. +65°C
Working pressure	100 - 1000 kPa
Connection size	G1/2
Installation width	150 ± 15 mm
Projection	436 - 460 mm
Backflow prevention (EN1717)	EB
Material	Brass

Regulations


EN standard	EN 1111, EN 1112, EN 1113
Noise class	I (ISO 3822)

Approvals and Declarations

Declaration of conformity	DoC
---------------------------	------------

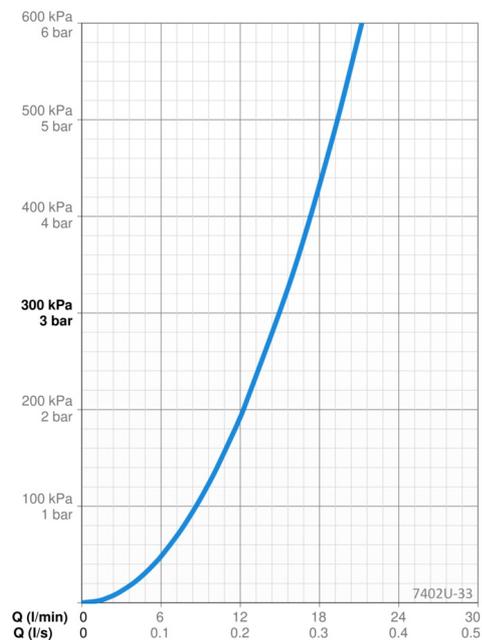

Spare parts

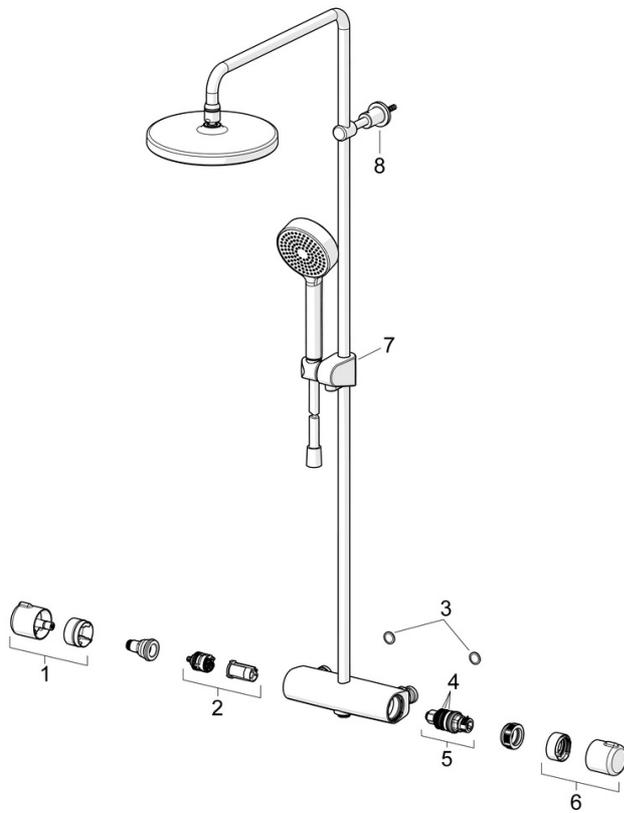

SP7402-33

	Name	Code
01	Flow control handle Matt black	1008616V-33
02	Diverter and cartridge	601278V
03	Filter sealing, G3/4, DN20	178375V
03	Litter filters, G1/2, DN15	198094/2
04	O-ring kit	178796V
05	Thermostatic cartridge	178780V
06	Temperature control handle Matt black	1008607V-33
07	Slide for shower rail Matt black	1002442V-33
08	Shower pipe holder Matt black	1001314V-33