



EAN: 6414150103261
static.oras.com/7412G-33



- Shower solutions
- Thermostatic
- Wall mounted
- Matt black
- Temperature control handle, Flow control handle, Eco feature for water flow
- Hand shower, Shower rail, Adjustable shower rail bracket, Soap dish, Shower hose (1500 mm), Eco flow control
- ECO - Water saving stream
- Limitation option for maximum temperature and flow-rate, Safety stop against scalding at 38°C
- Ceramic head part for flow control, Thermostatic cartridge for automatic temperature control, Non-return valve(s), Litter filter(s)
- Direct connection, Internal thread
- 1 spray function

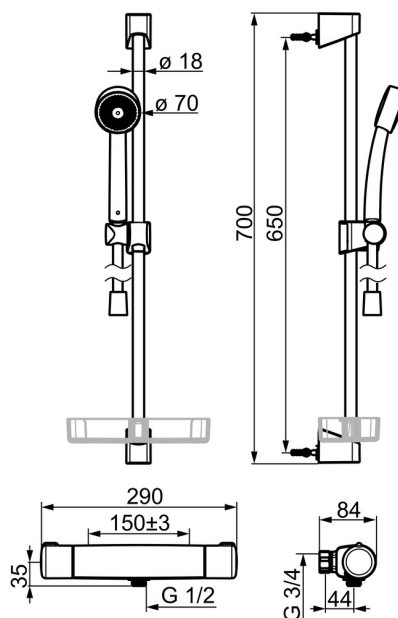

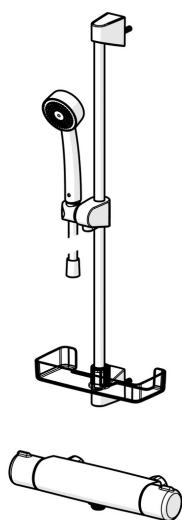

Technical data

Flow properties

Flow-rate at 300 kPa (with flow controller) 0.12 l/s

Technical properties

DN-size (nominal dimension) DN15
Hot water supply max. +80°C
Working pressure 100 - 1000 kPa
Connection size G3/4
Installation width 150 ± 15 mm
Backflow prevention (EN1717) EB
Material Brass

Regulations

EN standard EN 1111, EN 1112, EN 1113
Noise class I (ISO 3822) Oras lab.

Approvals and Declarations

Declaration of conformity DoC
EPD S-P-07819

Sustainability

EPD module A1 (kg CO2 eq.) 11,04
EPD module A2 (kg CO2 eq.) 0,57
EPD module A3 (kg CO2 eq.) 1,17
EPD module A1-A3 (kg CO2 eq.) 12,78
EPD module A4 (kg CO2 eq.) 0,33
EPD module B7 (kg CO2 eq.) 1389,60
EPD module C2 (kg CO2 eq.) 0,02
EPD module C3 (kg CO2 eq.) 0,02
EPD module C4 (kg CO2 eq.) 0,70
EPD module D (kg CO2 eq.) -8,35

