



EAN: 6414150103278

[static.oras.com/7422G-33](http://static.oras.com/7422G-33)

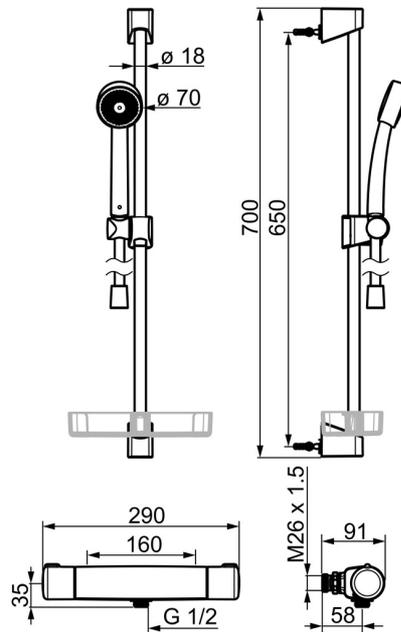

- Shower solutions
- Thermostatic
- Wall mounted
- Matt black
- Temperature control handle, Flow control handle, Eco feature for water flow
- Hand shower, Shower rail, Adjustable shower rail bracket, Soap dish, Shower hose (1500 mm), Eco flow control
- ECO - Water saving stream
- Limitation option for maximum temperature and flow-rate, Safety stop against scalding at 38°C
- Ceramic head part for flow control, Thermostatic cartridge for automatic temperature control, Non-return valve(s), Litter filter(s)
- Direct connection, Internal thread
- 1 spray function

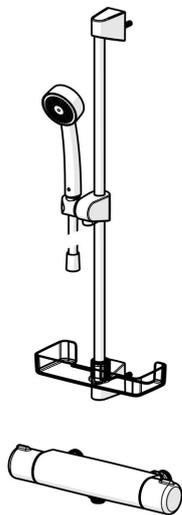

## Technical data

### Flow properties

Flow-rate at 300 kPa (with flow controller) **0.12 l/s**

### Technical properties

DN-size (nominal dimension) **DN15**  
 Hot water supply **max. +80°C**  
 Working pressure **100 - 1000 kPa**  
 Connection size **M26x1.5**  
 Installation width **160 mm**  
 Backflow prevention (EN1717) **EB**  
 Material **Brass**

### Regulations

EN standard **EN 1111, EN 1112, EN 1113**  
 Noise class **I (ISO 3822) Oras lab.**

### Approvals and Declarations

Declaration of conformity **DoC**  
 EPD **S-P-07819**

### Sustainability

EPD module A1 (kg CO2 eq.) **12,09**  
 EPD module A2 (kg CO2 eq.) **0,62**  
 EPD module A3 (kg CO2 eq.) **1,28**  
 EPD module A1-A3 (kg CO2 eq.) **14,00**  
 EPD module A4 (kg CO2 eq.) **0,37**  
 EPD module B7 (kg CO2 eq.) **1389,60**  
 EPD module C2 (kg CO2 eq.) **0,03**  
 EPD module C3 (kg CO2 eq.) **0,03**  
 EPD module C4 (kg CO2 eq.) **0,77**  
 EPD module D (kg CO2 eq.) **-9,15**

