


## Spare parts

- Spare parts
- Autofocus infrared sensor, Low battery indicator
- Faucet maintenance

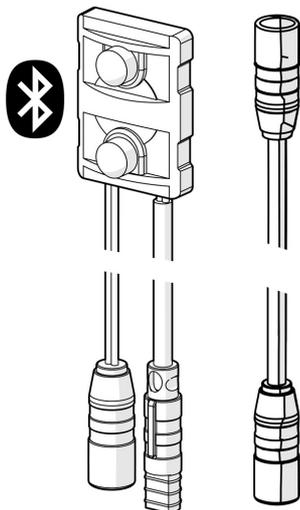

## Technical data

### Software settings

Afterflow period	3 s (1-20 s)
Automatic flush	off (off/1-120 h)
Automatic flush period	30 s (1-1800 s)
Max. flow period	2 min (1 - 1800 s)

### Electronic properties

Bluetooth version	4.x (D034445)
-------------------	---------------

### Regulations

EU Directives	CE Radio Equipment Directive 2014/53/EU , Low Voltage Directive 2014/35/EU , EMC Directive 2014/30/EU , RoHS Directive 2011/65/EU
EN standard	ETSI EN 301 489-1 V1.9.2 , ETSI EN 300 328 v2.2.2 , EN 61000-6-1:2007 , EN 61000-6- 3:2007+A1:2011+AC:2012 , EN 60335- 1:2012+A11+A13+A14+A2+A15:2021, Part 19.11.4
Protection class	IP 67

### Approvals and Declarations

Declaration of conformity	RED
---------------------------	-----