

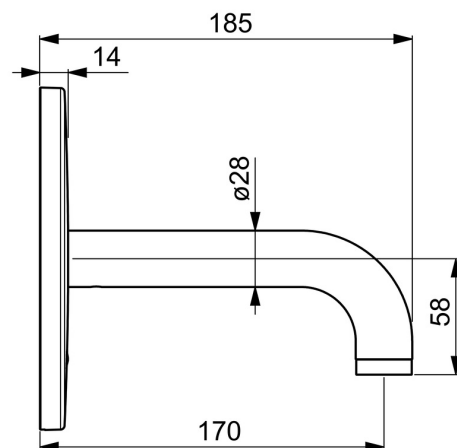


EAN: 6414150098895

static.oras.com/6610CZ

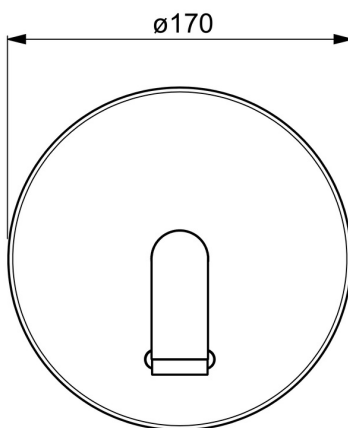

- Public & Semi-public
- Trim Kit, Touchless, Battery-operated, External transformer, Bluetooth®
- Concealed wall mounting
- Chrome
- Standard aerator, PCA® - constant flow rate regardless of pressure variations
- Litter filter(s)
- Autofocus infrared sensor, Solenoid valve, External control unit, Light indicated function(s), Low battery indicator
- One inlet for cold or premixed water
- Software settings adjustable via App
- Round rosette
- Without transformer

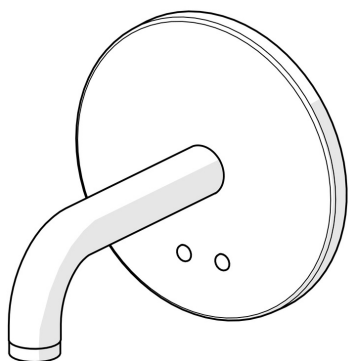



Technical data

Flow properties

Flow-rate at 300 kPa (with flow controller) 0.08 l/s

Technical properties

Hot water supply max. +70°C
Working pressure 100 - 1000 kPa
Projection 170 mm
Backflow prevention (EN1717) AA
Material Brass

Software settings

Afterflow period 3 s (1-20 s)
Automatic flush off (off/1-120 h)
Automatic flush period 30 s (1-1800 s)
Max. flow period 2 min (1 - 1800 s)

Electronic properties

Electrical Connection 12 V
Battery AA 1.5 V Lithium x 2
Bluetooth version 5.x (D060576)

Regulations


EU Directives C€ Radio Equipment Directive 2014/53/EU ,
Low Voltage Directive 2014/35/EU , EMC
Directive 2014/30/EU , RoHS Directive
2011/65/EU

EN standard EN 15091, ETSI EN 301 489-1 V1.9.2 , ETSI EN
300 328 v2.2.2 , EN 61000-6-1:2007 , EN 61000-
6-3:2007+A1:2011+AC:2012 , EN 60335-
1:2012+A11+A13+A1+A14+A2+A15:2021, Part
19.11.4


Noise class I (ISO 3822)
Protection class IP 55

Approvals and Declarations

UN38.3 UN38-3 Energizer L91
Declaration of conformity RED

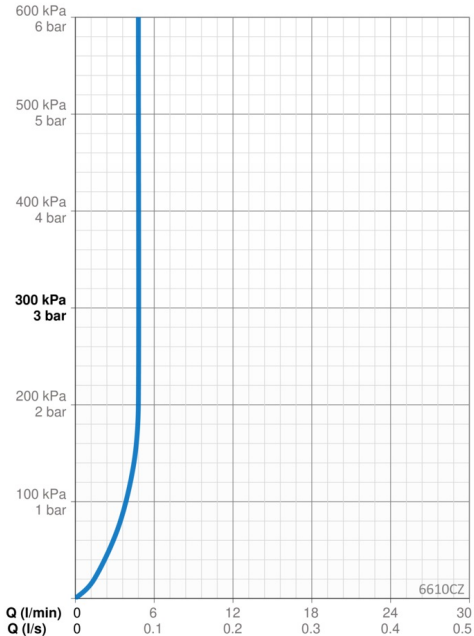

Spare parts

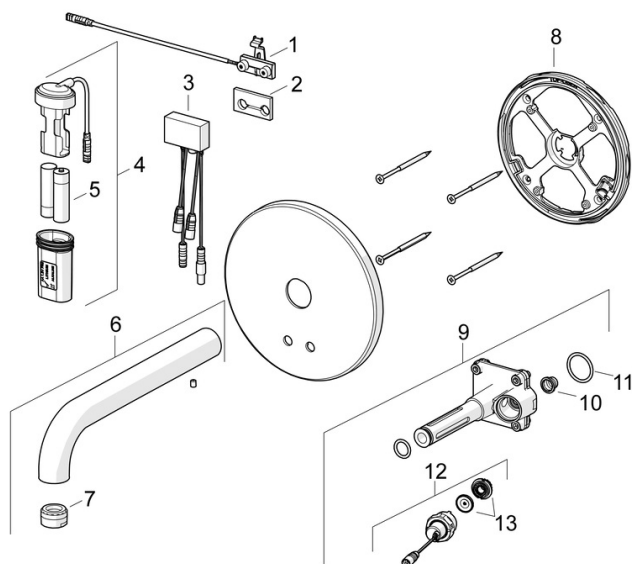

SP6611CZ

	Name	Code
01	Sensor, 245 mm	1010227V
02	Gasket	1010472V
03	Control unit, 3/12 V Bluetooth	1009970V
04	Battery casing	600617V
05	Battery, (2x) 1.5 V AA Lithium	600599V
06	Spout, L=170 Discontinued	602363V
06	Spout, L=245	602364V
06	Spout, L=310 Discontinued	602365V
07	Aerator, M24x1, -105	601166V
08	Fixing part Discontinued	602594V
09	Functional unit	602611V
10	Litter filters	199257/2
11	O-ring, 23.47x2.62 Discontinued	602649V
12	Solenoid valve complete, 3 V	601307V
13	Membrane Discontinued	601512V
13	Membrane for solenoid valve	1006500V