



# 2611FHZ ORAS OPTIMA STYLE HYBRID WASHBASIN FAUCET, 3 V, BLUETOOTH

HYBRID, BATTERY-OPERATED, BLUETOOTH®

EAN: 6414150099267 [static.oras.com/2611FHZ](http://static.oras.com/2611FHZ)

When great design becomes an attraction of its own, you know it will make a difference in your life. Besides bringing beauty to life, this new classic is also designed to bring any modern bathroom to the next level.

A hybrid faucet offers more flexibility and freedom of use: the user can choose whether they want to wash their hands with the touchless function without touching the lever - or whether they want to open the faucet traditionally with the lever. The hybrid faucet offers more convenience and flexibility in use and is also a sustainable choice: the touchless function consumes less water and energy. Slender design and graceful shapes make this faucet the highlight of any space.



Double Comfort

High quality  
Sleek design  
Anti-limescale rubber aerator for easy cleaning  
Bluetooth®  
Made in Europe

Perfect fit for any bathroom

- Deck mounted
- Chrome
- Swivel spout
- Standard aerator, PCA® - constant flow rate regardless of pressure variations
- Single operating lever/handle, Pin shape, Hot/Cold symbols
- Limitation option for maximum temperature and flow-rate, Adjustable hot water stop (included, retrofittable)
- ø 30 mm ceramic cartridge for flow and temperature control
- Infrared sensor, Solenoid valve, Low battery indicator
- Flexible inlet pipes
- Inner body made of DZR brass
- Without pop-up waste

## TECHNICAL DATA

### FLOW PROPERTIES

Flow-rate at 300 kPa (with flow controller)	0.1 l/s
Pressure loss with flow (0.1 l/s)	195 kPa

### TECHNICAL PROPERTIES

Hot water supply	max. +70°C
Working pressure	100 - 1000 kPa
Connection size	G3/8
Projection	147 mm
Backflow prevention (EN1717)	EB
Material	Brass

### SOFTWARE SETTINGS


Automatic flush	off (off/1-120 h)
Automatic flush period	30 s (1-1800 s)
Max. flow period	10 s (1-1800s)

### ELECTRONIC PROPERTIES

Battery	AA 1.5 V Lithium x 2
Bluetooth version	5.x (D060576)



## SPARE PARTS

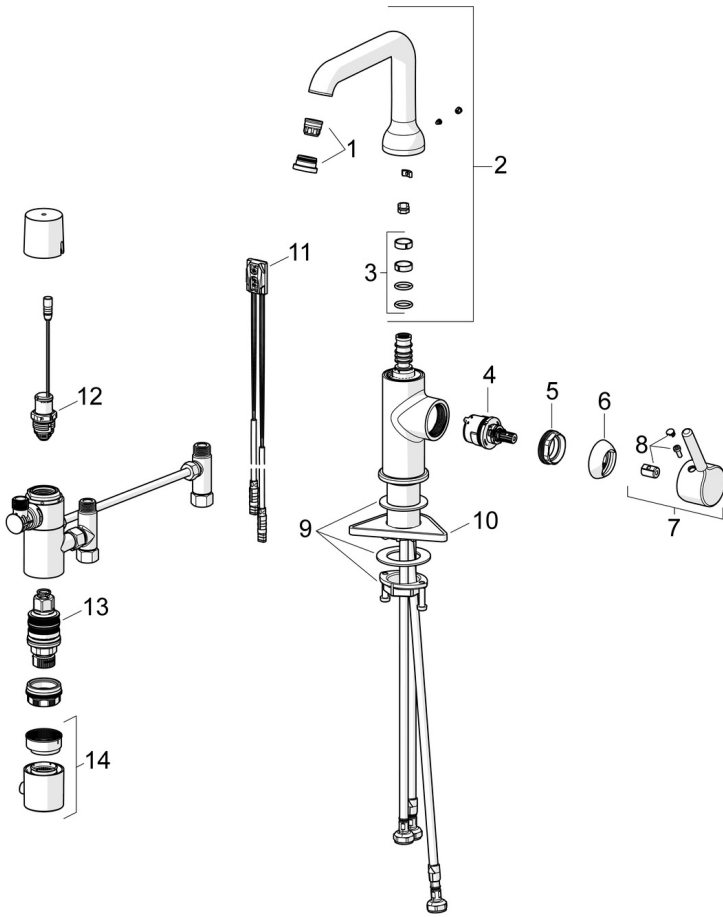

### SP2617FHZ

	Name	Code
01	Aerator and key, PCA 5.7 l/min Chrome	1012273V
02	High spout Chrome	1012339V
03	Sealing kit for spout	198287V
04	Cartridge, 3.0	1014428V
05	Tightening nut, M34x1.5, SW30	1012133V
06	Covering cap Chrome	1012132V
07	Lever Chrome	1001748V
08	Symbol plug Chrome	1012105V
09	Fixing set	602629V
10	Supporting plate, 100x60mm	158825
11	Sensor, 3/9 V, Bluetooth	1014212V
12	Pilot valve, 3 V	601884V-F
13	Thermostatic cartridge	178780V
14	Temperature control handle Chrome	602062V
N.I.	Battery, (2x) 1.5 V AA Lithium	600599V